


### H cores

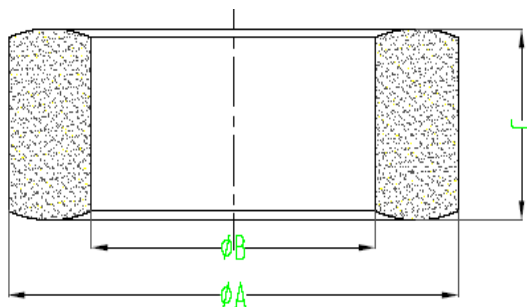

#### CORE SETS

#### CORE DIMENSIONS (mm)

Spray paint	Dimensions (mm)		
	$\Phi A$	$\Phi B$	C
Uncoat	$10.0 \pm 0.4$	$5.0 \pm 0.3$	$5.0 \pm 0.3$
Coat	10.8max	4.2min	5.8max

#### Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	294.37	mm <sup>3</sup>
le	effective length	24.51	mm
Ae	effective area	12.01	mm <sup>2</sup>
Wt	mass of core set	≈ 1.5	g

#### Characteristic

Grade	AL (nH/N <sup>2</sup> )	Z (Ω)
		f=1kHz U=0.25V N=10Ts, $\Phi 0.35$ mm
DN65H	$320 \pm 25\%$	18 min