



# 技术参数

technical parameter

DM-YK716-6

## 1、电气性能 Electrical Characteristics

NO.	项目/Items	规格/Specification
5-1	电阻/ Resistance	$24 \pm 3 \Omega$
5-3	额定电压/ Rated Load Voltage	12 Vdc
5-4	额定转速/ Rated Load Speed	$21000 \pm 3500 \text{ rpm}$
5-5	额定电流/ Rated Load Current	300 mA Max
5-6	堵转电流/ Blocking Current 启动电流/Startup Current	1 A Max.
5-7	噪音/ Noise	Max. 45dB(A) with haptic driving pattern (30cm distance from decibel meter 20~20KHz)
5-8	绝缘电阻/Insulation Resistance	Min. 10M ohm (100V DC input, between Case and lead wire)
5-9	触觉模式 Haptic Driving pattern	Vp: 9-14Vdc t1=5-8ms(Accelerate) t2=0-3ms(Brake) t3 $\leq$ 2000 ms(Off) (Refer to Figure 2)

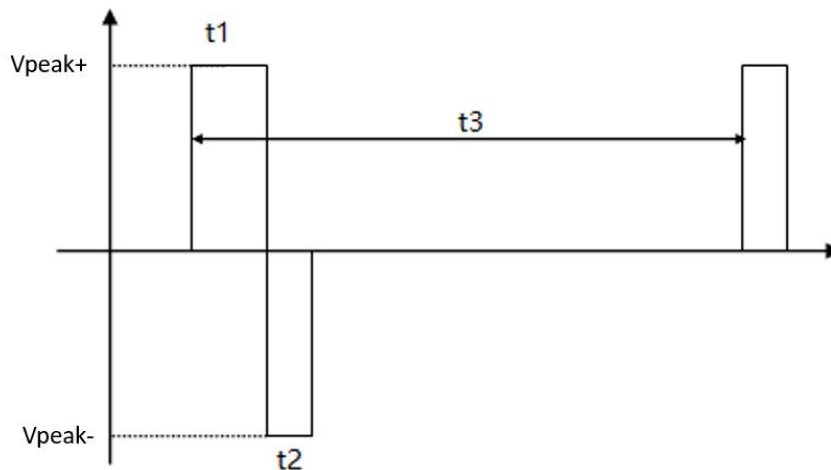


Figure 2

Driving waveform measured by Oscilloscope: Red connected to Power+,  
Black connected to GND-. Rotation orientation is Clockwise.

## 2、产品外形图 Product Drawing

