



浙江省东阳市东磁诚基电子有限公司

RoHS H/F

Zhejiang Dongyang Dmegc Chengji Electronics Co.,Ltd.

产品规格书

PRODUCT SPECIFICATION

产品信息 Product Information	品名/Description	直线式振动电机/ Linear Vibration Motor		
	规格型号/Part No.	DM-LM0815B-2		
	文件编号/DN			
	设计/Designed	审核/Checked	批准/Approved	
	王新欣	黄浩静	周仕	

客户信息 Customer Information	客户名称/Customer	
	机型/Model	
	客户料号/Part NO.	
	客户承认/Customer Approved	

地址：中国浙江省东阳市横店工业区

Address: Hengdian industrial Area, DongYang City, Zhejiang Province China

邮编/P.C: 322118

电话/TEL: +0086-0579-86588315 (86588791)

传真/FAX: +0086-0579-86553611



产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2

NO.2/12

重要提示 Important Notes:

1. 如对电机的性能和（或）寿命有任何争议，仅基于此规格书作出判断。

If there is any argument on motor performance and/or life, judgment is to be made base on this specification only.

2. 客户方有责任确认该电机能满足您的使用要求。

Customer has the responsibility to ensure that motor can satisfy the requirement of your application.

3. 如果公司未提供技术规格，该文件将详细叙述与贵公司商定的技术规格。

In the event that an official specification is not present by customer, this document will specify the agreed technical specification.

4. 在满足规格的条件下，我司可以改变零件材料、尺寸及形状来改善品质（或）性能（或）生产效率。

Within the limitation to satisfy this specification, DMEGC has the convenience to change the materials, size and shapes of components of the motor for the purpose of improving quality, and/or performance, and/or production efficiency.

5. 收到此规格书后，贵司应于下订单之前将规格书副本签回以示贵司已确认。如贵司未能在规定时间内签回副本，我司将认为贵司已收到并承认该规格书。

After the receipt of this specification, customer should send a signed copy to DMEGC, before you issued purchase order for the confirmation on acknowledgement. DMEGC, regard it as the receipt of this specification acknowledged if customer fails to return the confirmation to us within the described period.



内 容
Table of contents

- | | | |
|-----|---------|--|
| 01、 | 应用范围 | Application |
| 02、 | 储存和使用环境 | Storage, Operating Temperature/Humidity Circumstance |
| 03、 | 标准测试条件 | Standard Test Conditions |
| 04、 | 测试方法 | Test Method |
| 05、 | 规格 | Specifications |
| 06、 | 可靠性试验 | Reliability Test |
| 07、 | 可靠性试验判定 | Requirement Reliability Test Judgment |
| 08、 | 注意事项 | Caution for Use |
| 09、 | 产品外形图 | Product Outline Drawing |
| 10、 | 包装规范 | Packing Specification |



产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2
NO.5/12

1、应用范围 Application

— 本说明书适用于东磁 DM-LM0815B-2 电机。

This specification applies to linear vibration DM-LM0815B-2 model manufactured by DMEGC.

— 此规格书提供了直线振动马达的结构、功能和使用条件。

These specifications provide structure, function and usage condition for linear vibration motor.


2、储存和使用环境 Storage, Operating Temperature/Humidity Circumstance

序号 NO.	项目 Items	条件 Condition
2-1	储存环境 Storage temperature range	-40℃ ~ 85℃ , ordinary humidity (No condensation of moisture)
2-2	使用环境 Operating temperature range	-20℃ ~ 70℃, ordinary humidity (No condensation of moisture)

3、标准测试条件 Standard Test Conditions

序号 NO.	项目 Items	条件 Condition
3-1	温度 Standard test temperature	25±2℃
3-2	湿度 Standard test humidity	65%±20%RH
3-3	额定输入电压 Rated Input Voltage	0.9 V rms 交流正弦 0.9 V rms AC, Sinewave
3-4	输入频率 Input Frequency	170 Hz
3-5	测试方法 Test Method	见图 1 Refer to Figure 1

4、测试方法 Test Method

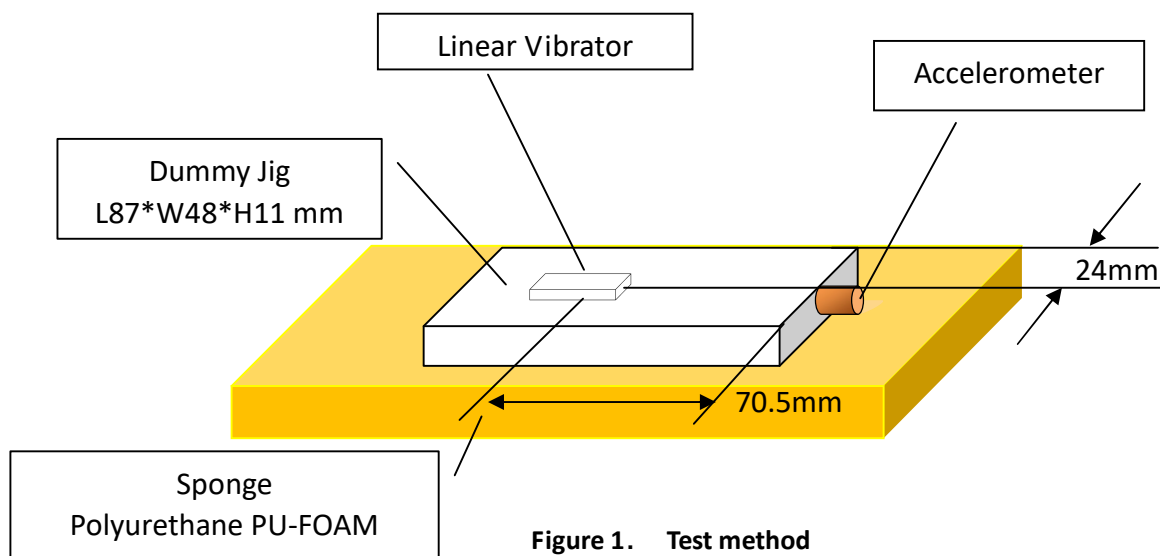

- 将测试马达和加速度传感器按照上图指定尺寸位置固定好
Attach accelerometer and vibrator on the position on dummy jig according to the figure 1.
- 工装和测试探头等的总质量为 100g
Test jig and accelerometer total weight is 100g.
- 接通后 2-3 秒后读数。
Acceleration of linear vibrator should be measured 2~3 second later when source inputed
- 测试过程中，传感器与测试治具要固定牢固。
At measurement of acceleration, test jig and accelerometer should be stabilized.
- 为了测量数据准确，测试数据取平均值。
For the precise measurement, test data is average data.
- 在不影响判定结果的情况下，测试环境温度和湿度可以放宽至 5-35℃，45%-85%RH。
If the judgment is not questionable, recognize measurement at 5℃ to 35℃ & relative humidity 45%RH to 85%RH.




产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2

NO.7/12

5、规格 Specifications

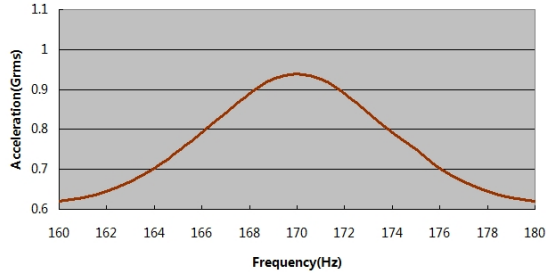序号 NO.	项目 Items	规格 Specification
5-1	额定电压 Rated Voltage	0.9Vrms AC
5-2	工作电压范围 Operating voltage range	0.1-1.0Vrms AC
5-3	工作电流 Work current	130 mA Max
5-4	线圈电阻 Coil resistance	9±1Ω (在 25±3℃下)
5-5	额定频率 Rated Frequency	170Hz
5-6	谐振频率 Resonance Frequency	170±10Hz 
5-7	0~50%启动时间 0~50% Rise time	40ms Max
5-8	100%~50%停止时间 100%~50% Fall time	60ms Max
5-9	振动加速度 Vibration Acceleration	Input Source : Motor F0, 0.9Vrms AC, sinewave 0.9±0.2Grms
5-10	噪音 Noise	≤50dB(A),(10cm distance from decibel meter Input Source : 0.9Vrms AC, Sinewave)
5-11	绝缘电阻 Insulation resistance	≥10MΩ



产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2

NO.8/12

6、可靠性试验 Reliability Test

NO. 序号	Test Item 试验项目	Test condition 试验条件	Quantity 数量
6-1	滚筒 Tumbling box	工装重量/JIG Weight: 180g 高度/ High: 1m, steel plate 跌落次数/Time: 10times/min, total 200times	10
6-2	跌落实验 Drop Test	工装重量/JIG Weight: 180g 高度/ High: 1.5m 跌落次数/Time: 6 个面各 3 次/ 6 surfaces, 3 times in each surface 试验状态/Test state: 将电机放在重约 180 克的工装里, 自由地跌落至混凝土地面上 The motor is set into the box approximately weight 180g and fall free on the concrete floor	10
6-3	高温存储 High temperature Storage	温度/Temperature: 85°C±2°C 时间/Time: 96H 湿度/Humidity: 常湿/Ordinary Humidity	10
6-4	低温存储 Low temperature Storage	温度/Temperature: -40±2°C 时间/Time: 96H 湿度/Humidity: 常湿/Ordinary Humidity	10
6-5	温度冲击 Temperature shock	温度/Temperature: -40°C~85°C 1 个周期/1 cycle: -40°C 30min, 85°C 30min 循环周期数/Circle cycle: 24cycles	10
6-6	高温高湿 High temperature and humidity	温度/Temperature: 85°C±2°C 湿度/Humidity: 85%RH 时间/Time: 96 小时	10
6-7	常温寿命 Life	测试电压/Voltage: 额定电压 频率/Frequency: 额定频率 1 个周期/1 cycle: 2sec ON/1sec OFF 寿命周期/life cycle: 300,000 cycles	10



7、可靠性试验判定 Requirement Reliability Test Judgment

7-1 试验完毕后在标准测试条件下放置 2 小时后再进行测试。

After the test is completed, place it under standard test conditions for 2 hours before conducting the test.

7-2 以下条件必须在试验结束后满足(试验条件里有另外说明的项目除外)

The following conditions must be met after the test (unless otherwise specified in the test conditions)

可靠性后 F0 变化量: 变化量 $\leq 10\text{Hz}$, F0 variation after reliability: variation $\leq 10\text{Hz}$,

振动量变化: $\leq \pm 30\%$; Vibration variation: $\leq \pm 30\%$;

噪音: $\leq 50\text{dB(A)}$; Noise: $\leq 50\text{dB(A)}$;

外表和结构无明显异常、腐蚀。

The appearance and structure shall be free of obvious abnormalities and corrosion.

8、注意事项 Caution for Use

8-1 不要在如下条件下使用马达, 它将降低产品的性能甚至马达损坏。

Don't use under the following conditions. It may cause decline of performance or damage.

8-1.1 不要将产品放入水、酒精等液体中。

Do not drop into fluid (such as water, alcohol, etc)

8-1.2 不要将产品长期置于高温高湿条件下。

Do not keep at high temperature or high humidity for extended periods of times.

8-1.3 不要将产品靠近腐蚀性气体。

Do not use near gasses which cause erosion.

8-2 马达的额定电压为 0.9V, 工作电压为 0.1~1.0V, 实际使用中马达最大驱动电压不能超过 1.0V.

Motor rated voltage is 0.9V, working voltage is 0.1~1.0V, so motor drive voltage can not exceed 1.0V.

8-3 马达的额定驱动信号为交流正弦波, 推荐使用标准信号进行马达驱动。

Motor driving signal should be AC sine wave.

8-4 在存储、运输和使用的过程中不要将产品靠近磁性设备。如: 不能使用磁性吸笔安装马达。

Don't make the product near magnetic devices in the process of storage, transportation and use. Such as do not use magnetic pen to assemble the motor.

8-5 这款马达有强磁性, 使用的时候需要注意。

The vibrator has a strong magnet, please pay attention to it.



产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2
NO.10/12

8-6 马达固定时，振动方向上必需固定好(安装力推荐 5~8N)，否则将容易引起噪音。

Vibrator should be fixed to house firmly in vibrate direction (setting force 5~8N), or it will be easy to cause noise.

8-7 马达安装时，推荐使用双面胶固定，同时用软态材料(泡棉)提供压力。

Use double side adhesive to fix the motor, Soft material (such as poron, poam etc.) can be used to provide setting pressure.

8-8 包装：请参考包装图纸(也可以依据客户需求作调整)。

Packing: Please refer to the packaging drawing. (It can be modified by the request of the users.)

8-9 发生任何问题，客户与东磁之间可通过协商解决问题，并通过书面的形式来反映问题

If any problems occur, both the user and DMEGC shall try to solve the problem by mutual agreement and on reflection of the specification sheet.

8-10 禁用物质允许含量 Prohibited substances allowed in

禁用物质名称 Substance name	镉及镉化物 (Cd) ppm	铅及铅化物 (Pb) ppm	汞及汞化物 (Hg) ppm	六价铬化合物 (Cr) ppm
标准 Threshold Level	≤70	≤800	≤500	≤500
禁用物质名称 Substance name	包装 (In packing material) (Cd、Pb、Hg、Cr) ppm	多溴联苯 (PBB) ppm	多溴二苯醚 (PBDE) ppm	溴 Br 氯 Cl
标准 Threshold Level	≤80	≤600	≤600	Br≤900ppm Cl≤900ppm Total content≤1500ppm
禁用物质名称 Substance name	邻苯二甲酸二乙酯 (DEHP)	邻苯二甲酸二丁酯 (DBP)	邻苯二甲酸二丁苄酯 (BBP)	邻苯二甲酸二异丁酯 (DIBP)
标准 Threshold Level	ND	ND	ND	ND




产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2

NO.11/12

9、产品外形图 Product Outline Drawing

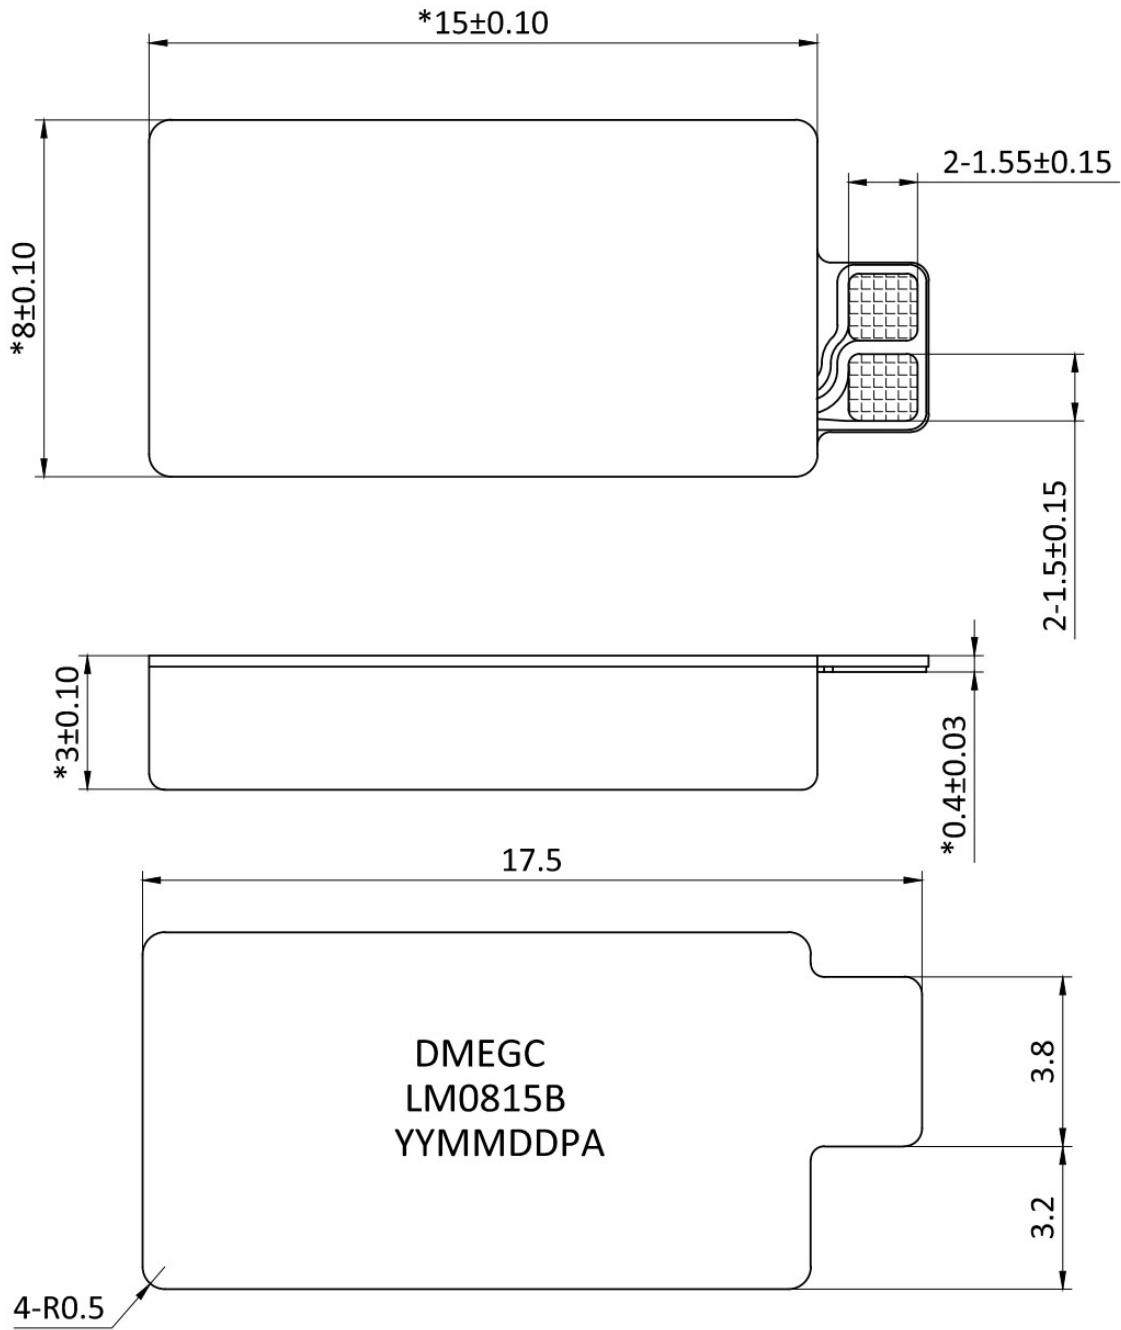



产品规格书

PRODUCT SPECIFICATION

DM-LM0815B-2
NO.12/12

10、包装规范 Packing Specification(TBD)

10-1 一箱内包装 2000PCS 马达。

Pack 2000 pcs vibrator in a carton.

10-2 箱体规格为 455mm×275mm×185mm(2000 只装外包装)。

260mm×220mm×170mm (1000 只装内包装)。

The body specification of the case is 470mm × 275mm × 185mm(2000pcs), 260mm × 220mm × 170mm(1000pcs)

10-3 单盒为 50PCS 标准，一小箱为 20 盒 1000PCS 标准，一箱为 2 小箱 2000PCS 标准。

50pcs (1 tray), 20tray (1 bundle), 2bundle (1 carton)

10-4 箱外侧标识品名、型号、厂名。

Mark name of an article, type, quantity, weight and factory name on the outside of the carton.

包装示例 Package Demonstration

