


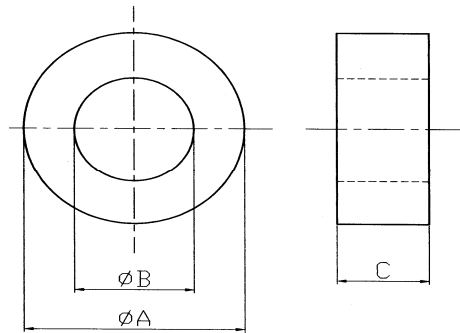

CORE SETS

CORE DIMENSIONS (mm)

After coating	Dimensions (mm)		
	ΦA	ΦB	C
	$23.60^{+0.8}_{-0.2}$	$14.40^{+0.2}_{-0.63}$	$18.00^{+1.0}_{-0.2}$

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	4615.80	mm ³
le	effective length	58.80	mm
Ae	effective area	78.50	mm ²

Characteristic

Grade	AL (nH/N ²)
	f=200kHz U=0.05V
26 μ	$45 \pm 8\%$
60 μ	$104 \pm 8\%$
75 μ	$129 \pm 8\%$
90 μ	$156 \pm 8\%$
125 μ	$215 \pm 8\%$
160 μ	$275 \pm 8\%$
200 μ	$344 \pm 8\%$