


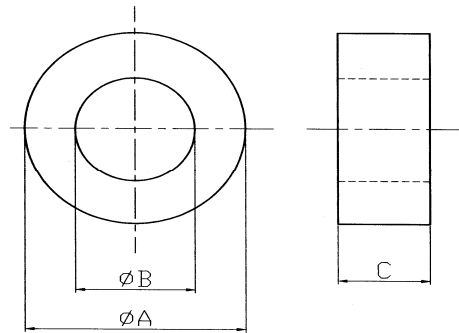

CORE SETS

CORE DIMENSIONS (mm)

After coating	Dimensions (mm)		
	ϕA	ϕB	C
	$25.20^{+0.8}_{-0.2}$	$14.60^{+0.2}_{-0.7}$	$10.00^{+0.8}_{-0.2}$

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	3074.40	mm ³
le	effective length	61.00	mm
Ae	effective area	50.40	mm ²

Characteristic

Grade	AL (nH/N ²)
	f=200kHz U=0.05V
26 μ	$27 \pm 8\%$
60 μ	$62 \pm 8\%$
75 μ	$77 \pm 8\%$
90 μ	$93 \pm 8\%$
125 μ	$129 \pm 8\%$
160 μ	$165 \pm 8\%$