


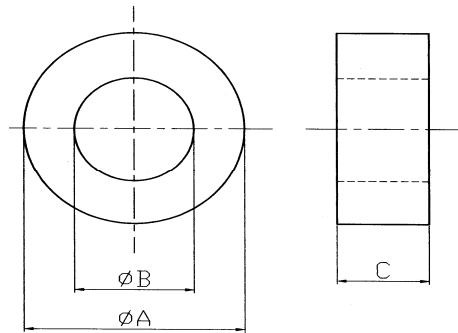

## CORE SETS

## CORE DIMENSIONS (mm)

| After coating | Dimensions (mm)       |                       |                       |
|---------------|-----------------------|-----------------------|-----------------------|
|               | $\Phi A$              | $\Phi B$              | C                     |
|               | $26.92^{+0.8}_{-0.2}$ | $15.2^{+0.2}_{-0.63}$ | $11.9^{+0.76}_{-0.2}$ |

## Effective core parameters

| SYMBOL | PARAMETER        | VALUE   | UNIT            |
|--------|------------------|---------|-----------------|
| Ve     | effective volume | 4257.33 | mm <sup>3</sup> |
| le     | effective length | 62.70   | mm              |
| Ae     | effective area   | 67.90   | mm <sup>2</sup> |

## Characteristic

| Grade     | AL (nH/N <sup>2</sup> ) |
|-----------|-------------------------|
|           | f=200kHz<br>U=0.05V     |
| 26 $\mu$  | $32 \pm 8\%$            |
| 60 $\mu$  | $75 \pm 8\%$            |
| 75 $\mu$  | $94 \pm 8\%$            |
| 90 $\mu$  | $113 \pm 8\%$           |
| 125 $\mu$ | $157 \pm 8\%$           |
| 160 $\mu$ | $201 \pm 8\%$           |