


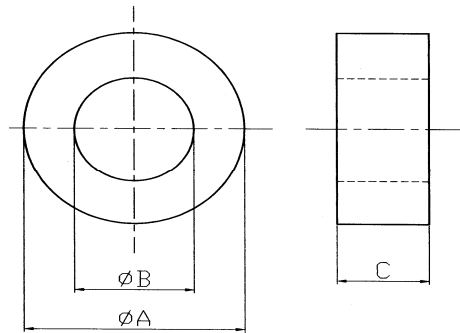

CORE SETS

CORE DIMENSIONS (mm)

After coating	Dimensions (mm)		
	ΦA	ΦB	C
	$26.90^{+0.8}_{-0.2}$	$14.70^{+0.2}_{-0.63}$	$18.00^{+1.0}_{-0.2}$

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	6667.50	mm ³
le	effective length	63.50	mm
Ae	effective area	105.00	mm ²

Characteristic

Grade	AL (nH/N ²)
	f=200kHz U=0.05V
26 μ	$51 \pm 8\%$
60 μ	$120 \pm 8\%$
75 μ	$150 \pm 8\%$
90 μ	$180 \pm 8\%$
125 μ	$250 \pm 8\%$
160 μ	$320 \pm 8\%$