


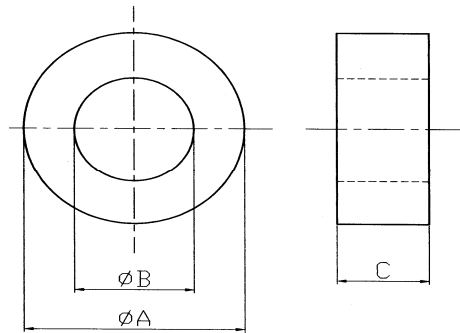

CORE SETS

CORE DIMENSIONS (mm)

After coating	Dimensions (mm)		
	ΦA	ΦB	C
	$33.27^{+0.81}_{-0.2}$	$18.00^{+0.2}_{-0.64}$	$11.52^{+0.98}_{-0.3}$

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	6590.80	mm ³
le	effective length	78.09	mm
Ae	effective area	84.40	mm ²

Characteristic

Grade	AL (nH/N ²)
	f=200kHz U=0.05V
26 μ	$36 \pm 8\%$
60 μ	$83 \pm 8\%$
75 μ	$104 \pm 8\%$
90 μ	$125 \pm 8\%$
125 μ	$173 \pm 8\%$
160 μ	$221 \pm 8\%$