



技术参数


technical parameter

DM-LM0710

1、电气性能 Electrical Characteristics

序号 NO.	项目 Items	规格 Specification
5-1	额定电压/ Rated Voltage	2.3 Vrms
5-2	工作电压/ Operating Voltage Range	0~2.35 Vrms
5-3	电阻/ Resistance	16±2 Ohm
5-4	额定电流/ Rated Current	Max. 180 mArms
5-5	额定频率/ Rated Frequency	330 Hz
5-6	F0 点振动量/ Acceleration@F0	3.0±0.6 Grms @ 200gram_load
5-7	频率特性/ Frequency Characteristics	330±20Hz
5-8	上升时间/ Rising time	50ms Max from 0 to 50% normal acceleration
5-9	下降时间/ Falling time	50ms Max from 100% to 50% normal acceleration
5-10	噪音/ Noise	Max. 45 dB(A) (30cm distance from decibel meter Input Source : 335Hz, 2.3Vrms AC, Sinewave)
5-11	绝缘电阻/Insulation Resistance	Min. 10M ohm (100V DC input, between MOTOR and Lead wire)

2、产品外形图 Product Drawing

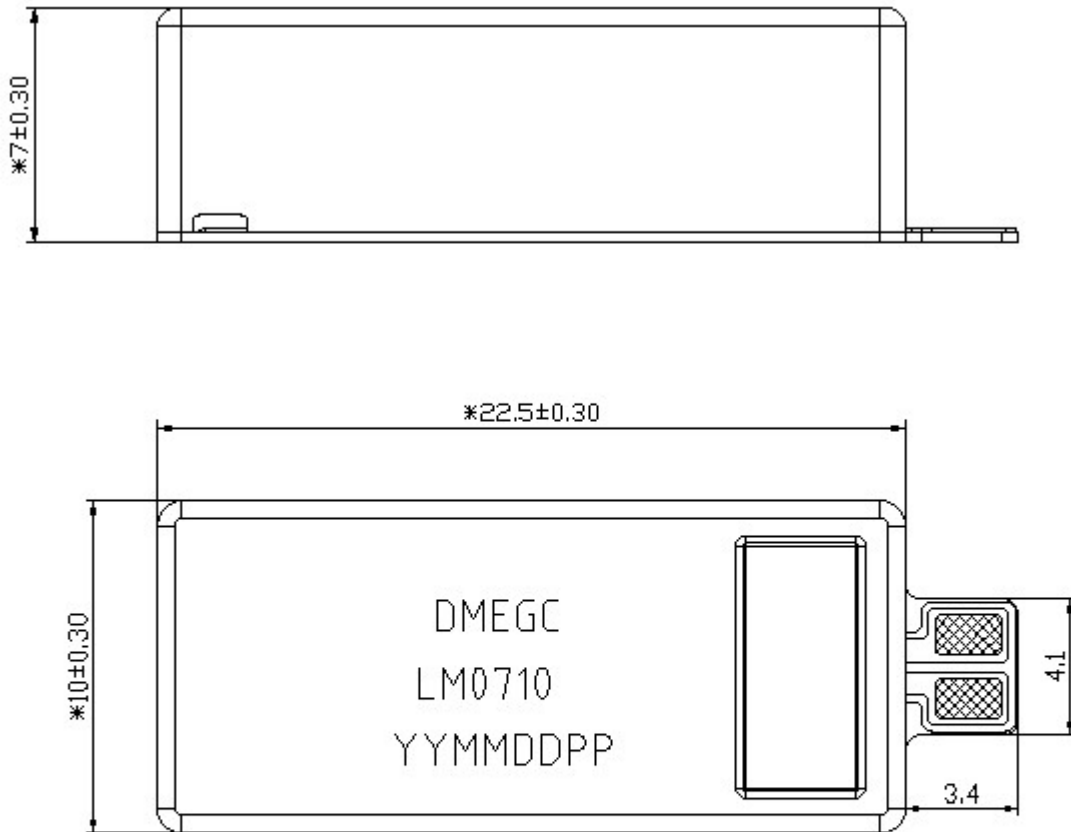

打码规则: Coding

DMEGC: 生产商代号 (Manufacturer code)

LM0710: 马达型号 (Motor model)

YYMMDDPA: 生产批次 Production batch